

Handschweißbrenner Welding Torch



Technische Daten: ARS 400 G

Belastung: 400 A CO₂ (nach EN 60 974-7)
300 A ArCO₂ / M21
Einschaltdauer: @ 60%
Draht-ø: 0,8 - 1,6 mm

Artikel Nr. / Einzelheiten	3 m	4 m	5 m
Euro-Anschluss	ARS302030	ARS402030	ARS502030
Euro-Anschluss mit Federpins	ARS302031	ARS402031	ARS502031
Aut 180° - 22° - 45° - 60°	ARS302130	ARS402130	ARS502130


Technical Data: ARS 400 G

Rating: 400 A CO₂ (accor. to EN 60 974-7)
300 A ArCO₂ / M21
Duty Cycle: @ 60%
Wire Diameter: 0.8 - 1.6 mm

Part Number / Details	3 m	4 m	5 m
Euro	ARS302030	ARS402030	ARS502030
Euro / Spring Pins	ARS302031	ARS402031	ARS502031
Automatic 180° - 22° - 45° - 60°	ARS302130	ARS402130	ARS502130

Handschweißbrenner

Welding Torch

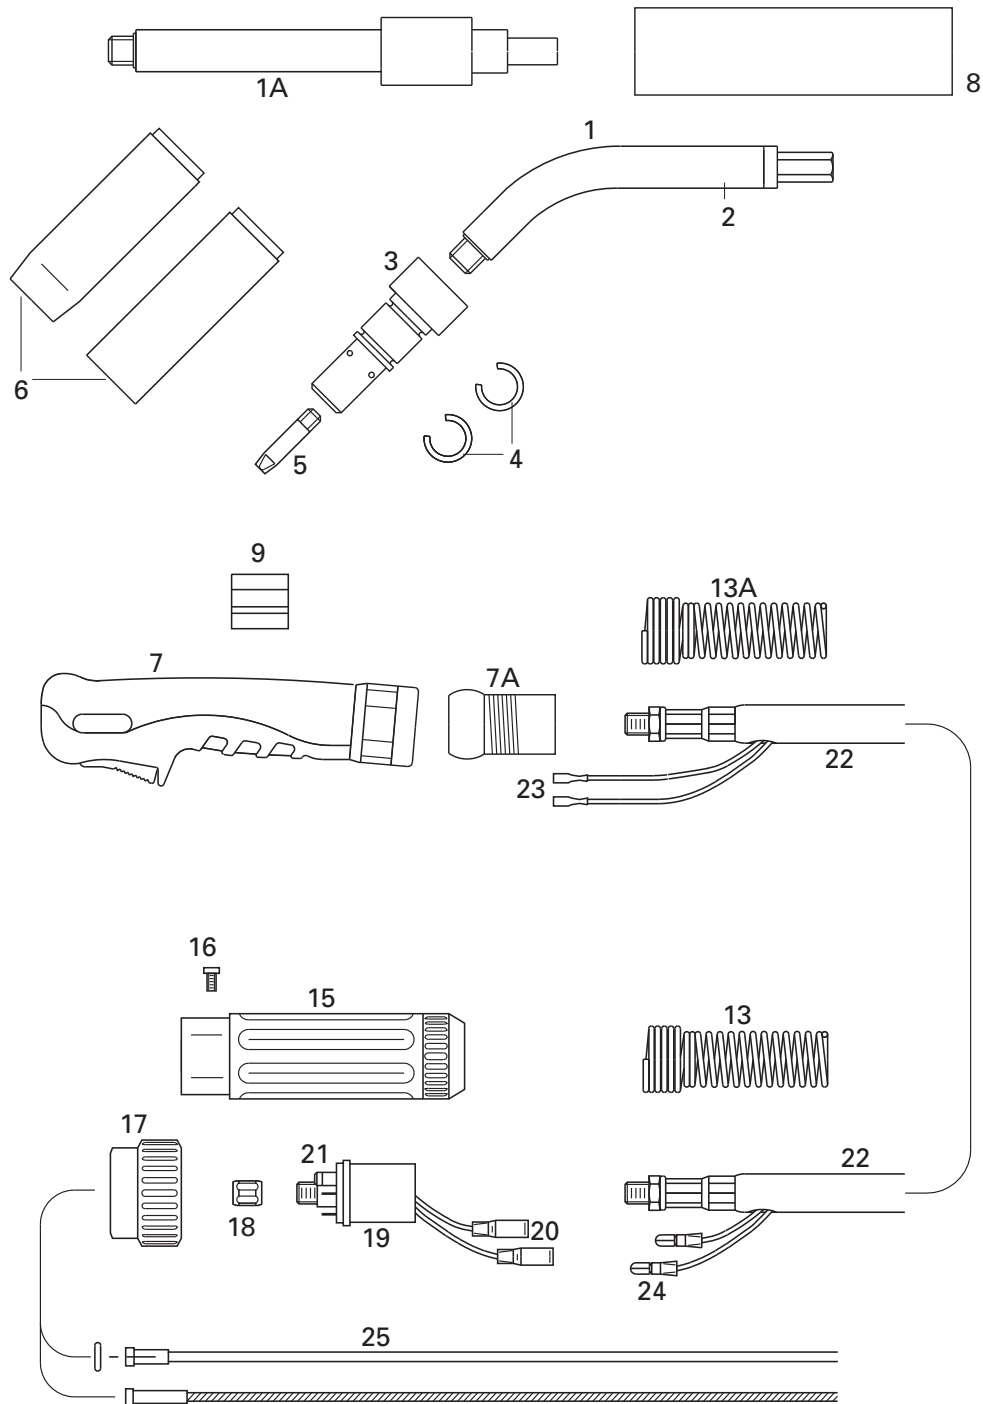

1	Brennerbauteile Torch Components	Brennerkörper ARS 400 Swan Neck ARS 400 G	ARS010040
1A		Brennerkörper ARS 400 AUT 180° Swan Neck ARS 400 G / AUTOM. 180°	ARS011040
		Brennerkörper ARS 400 AUT 22° Swan Neck ARS 400 G / AUTOM. 22°	ARS011140
		Brennerkörper ARS 400 AUT 45° Swan Neck ARS 400 G / AUTOM. 45°	ARS011240
		Brennerkörper ARS 400 AUT 60° Swan Neck ARS 400 G / AUTOM. 60°	ARS011340
2		Isolierschlauch für Brennerhals ARS 400 G Insulating Hose ARS 400 G	ARS550040
3		Düsenstock ARS 400 G mit Federringen Tip Adapter ARS 400 G with Rings	ARS040040
4		Federring Metal Ring	ARS010044
5	Kontaktdüsen Contact Tips	Kontaktdüse 0,8 mm ARS 400 G Contact Tip D. 0.8 - ARS 300/400/350/510	ARS061008
		Kontaktdüse 1,0 mm ARS 400 G Contact Tip D. 1.0 - ARS 300/400/350/510	ARS061010
		Kontaktdüse 1,2 mm ARS 400 G Contact Tip D. 1.2 - ARS 300/400/350/510	ARS061012
		Kontaktdüse 1,6 mm ARS 400 G Contact Tip D. 1.6 - ARS 300/400/350/510	ARS061016
		Kontaktdüse Alu 0,8 mm ARS 400 G Contact Tip D. 0.8 AL - ARS 300/400/350/510	ARS661008
		Kontaktdüse Alu 1,0 mm ARS 400 G Contact Tip D. 1.0 AL - ARS 300/400/350/510	ARS661010
		Kontaktdüse Alu 1,2 mm ARS 400 G Contact Tip D. 1.2 AL - ARS 300/400/350/510	ARS661012
		Kontaktdüse Alu 1,6 mm ARS 400 G Contact Tip D. 1.6 AL - ARS 300/400/350/510	ARS661016
		Kontaktdüse CuCrZr 0,8 mm ARS 400 G Contact Tip D. 0.8 Special - ARS 300/400/350/510	ARS761008
		Kontaktdüse CuCrZr 1,0 mm ARS 400 G Contact Tip D. 1.0 Special - ARS 300/400/350/510	ARS761010
		Kontaktdüse CuCrZr 1,2 mm ARS 400 G Contact Tip D. 1.2 Special - ARS 300/400/350/510	ARS761012
		Kontaktdüse CuCrZr 1,6 mm ARS 400 G Contact Tip D. 1.6 Special - ARS 300/400/350/510	ARS761016
6	Gasdüsen Gas Nozzles	Gasdüse zylindrisch ARS 400 G Gas Nozzle Cylindrical - ARS 400/510	ARS080011
		Gasdüse konisch ARS 400 G Gas Nozzle Conical - ARS 400/510	ARS081012
7		ERGO-Griff kpl. mit Druckschalter ERGO-Handle cpl.	ARS111155
7A		Knickschutz-Kugelgelenk Swivel	ARS111175
8	Schlauchpaket Cable Assembly	Griffrohr AUT Handle Tube	ARS029006

9	Anschlußkörper Connection Body	ARS150300
13	Knickschutzfeder Cable Support Spring	ARS151201
13A	Knickschutzfeder griffseitig Gas Cable Support Spring ERGO-Gas	ARS111191
15	Knickschutz zweiteilig Gun Plug Housing	ARS251601
16	Schraube Screw M 4 x 6	ARS040601
17	Anschlussmutter Plug Nut	ARS151700
18	Ms-Überwurfmutter Liner Positioner Nut	ARS151501
19	ZA-Stecker, Luft Gun Plug Body, air cooled (Euro)	ARS151500
	ZA-Stecker, Luft mit Federpins Gun Plug Body with Spring Loaded Pins	ARS151505
20	Rundsteckbuchse, isoliert Femal Electrical Connector, insulated	ARS155100
21	O-Ring 4 x 1 O-Ring 4 x 1	ARS041000
22	Koaxialkabel 50 mm ² / 3 m Coaxial Cable 50 mm ² / 3 m	ARS005030
	Koaxialkabel 50 mm ² / 4 m Coaxial Cable 50 mm ² / 4 m	ARS005040
	Koaxialkabel 50 mm ² / 5 m Coaxial Cable 50 mm ² / 5 m	ARS005050
23	Flachhülse 2,8 x 0,8 blank Female Electrical Connector	ARS415304
24	Rundstecker, isoliert Male Electrical Connector, insulated	ARS155200
25	DF-Spiralen ummantelt Coated Liners	
	DF-Spirale 1,5 x 4,0 mm / 3 m Steel Liner 1.5 x 4.0 mm / 3 m	ARS441530
	DF-Spirale 1,5 x 4,0 mm / 4 m Steel Liner 1.5 x 4.0 mm / 4 m	ARS441540
	DF-Spirale 1,5 x 4,0 mm / 5 m Steel Liner 1.5 x 4.0 mm / 5 m	ARS441550
	DF-Spirale 2,0 x 4,0 mm / 3 m Steel Liner 2.0 x 4.0 mm / 3 m	ARS442030
	DF-Spirale 2,0 x 4,0 mm / 4 m Steel Liner 2.0 x 4.0 mm / 4 m	ARS442040
	DF-Spirale 2,0 x 4,0 mm / 5 m Steel Liner 2.0 x 4.0 mm / 5 m	ARS442050