

GIASCO

SAFETY SHOES



TM



BOOK2022



MANAGEMENT SYSTEM CERTIFICATE

DNV-GL



MADE IN ITALY



PRODUCTION



TECHNOLOGY



CERTIFICATIONS



PROMPT DELIVERY




DESIGN





TECHNOLOGY

 3D ist eine revolutionäre und patentierte Technologie, die es gestattet einen einzigartigen Schuh mit drei verschiedenen Schichten aus in das Oberleder injiziertem Polyurethan anzubieten. Das Ziel dieses Produkts ist es, dem Fuß dank der drei unterschiedlichen Dichten der verschiedenen Schichten der Sohle einen maximalen Komfort sowie eine sichere Stabilität zu bieten.

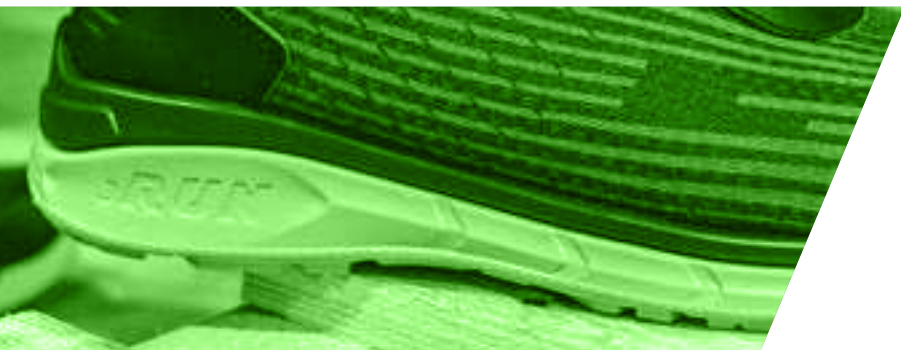


3RUN

**TRIPLE YOUR
STYLE**



3CROSS

**TRIPLE YOUR
STABILITY**

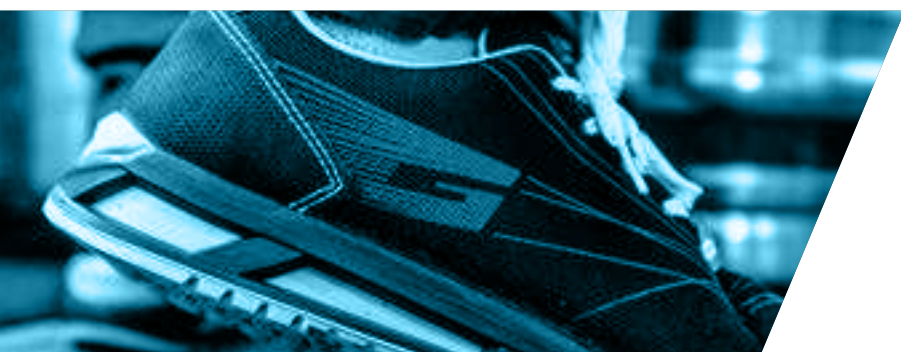

3HYBRID

**TRIPLE YOUR
COMFORT**



3MOVE


**TRIPLE YOUR
MOBILITY**





3PU PATENT

3MOVE



SRC
ANTI-SLIPPING SOLE

*extra
LIGHT
shoes*



TECHNOLOGY
3PU INJECTION SEQUENCES



ANTI-TORSION INSERT

TILTED HEEL TO
IMPROVE THE WALKING

BENDING POINT

ANTI-SLIPPING HEEL

ANTISHOCK



COMFORT

STABILITY

ANTISLIP



FOX S3

36-47

3M453N



TIGER S3

36-47

3M457N



LION S3

36-47

3M184K



CHEETAH S1P

39-47

3M184Y





MAKO S1P

36-47

3M182T



SHARK S1P

36-47

3M450N



LEOPARD S1P

36-47

3M454T



FALCON S3

36-47

3M474NA





3PU PATENT

3HYBRID



SRC
ANTI-SLIPPING SOLE

*extra
LIGHT
shoes*



TECHNOLOGY
3PU INJECTION SEQUENCES



ANTI-TORSION INSERT

BENDING POINT

TILTED HEEL TO
IMPROVE THE WALKING

ANTI-SLIPPING HEEL

ANTISHOCK



COMFORT

STABILITY

ANTISLIP



ARUBA S3
36-47

3H192EV



MYKONOS S1P
36-47

3H192ER



NEW

SYLT S1P
39-47

3H432Y



BURGAZ S1P
36-47

3H184J



GOTLAND S1P
39-47

3H224EJ



NEW

FUERTEVENTURA S1P
36-47

3H433N





TAHITI S1P

36-47

3H171Q



LAS VEGAS S1P

36-47

3H154EC



PAG S3

36-47

3H063N



JAVA S3

36-47

3H022C



MALÈ S3

39-47

3H022H





FIJI S3
39-47

3H142EV



BALI S3
36-47

3H149EV



SAMOA S1P
36-47

3H085N




PANAREA S1P
36-47

3H174V



LIPARI S1P
36-47

3H182NG



BORNEO S3
36-47

3H037NG





USTICA S2
36-47

3H002I



CORFU S2
36-47

3H002O



MAUI S3
36-47

3H191I



ZANTE S1P
36-47

3H095I



MINORCA S2
36-47

3H020I





3PU PATENT

3CROSS




SRC
ANTI-SLIPPING SOLE

*extra
LIGHT
shoes*



TECHNOLOGY
3PU INJECTION SEQUENCES

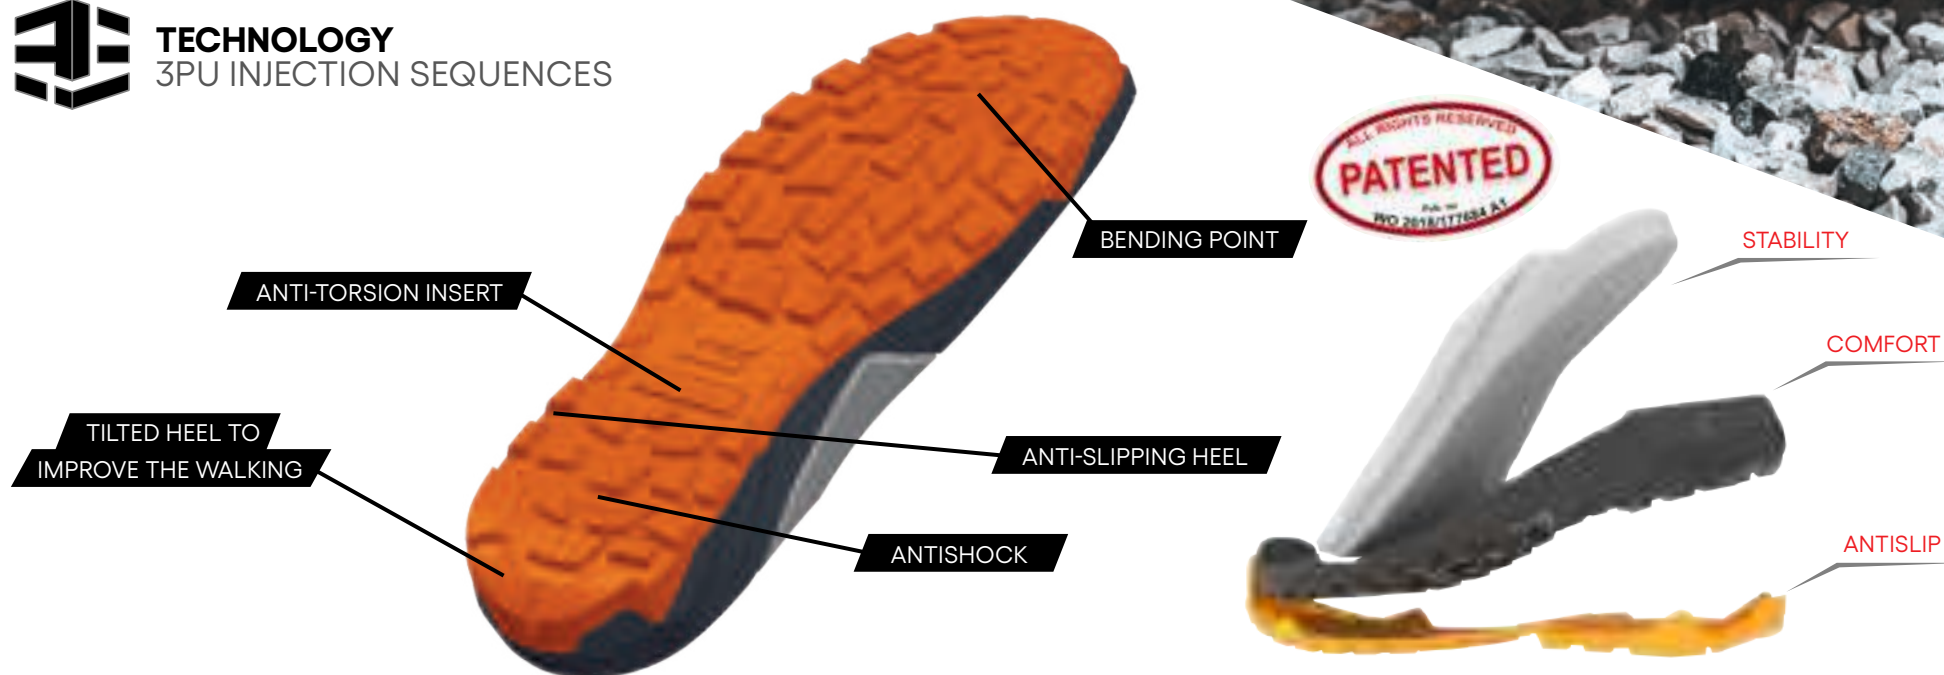




TEIDE S1P
36-47

3C094T



K2 S3 CI
39-47

3C149E



ELBRUS S3
36-47

3C198N




STELVIO S3 CI
39-47

3C224N




MAKALU S3 CI WR
38-47

3C058G



HIMALAYA S3 CI WR
39-47

3C178E





AINOS S3

36-47



3C022C



EIGER S3

39-47



3C022H



THOMSON SB FO E P CI WRU

3C060D

38-47



ASTM 2413-11
C.S.A. Z195-14
INSULATING SOLE
FROM >1000 MΩ



SINAI S1P

36-47



3C182T



KAMET S3 CI

39-47



3C122D



ANETO S3

36-47



3C1910




TRIVOR S3

36-47



3C1980





3PU PATENT

3RUN



SRC
ANTI-SLIPPING SOLE

*extra
LIGHT
shoes*



TECHNOLOGY
3PU INJECTION SEQUENCES





HURRICANE S3
39-47

3R171V



LESTE S1P
36-47

3R171Q



BERG S3
39-47

3R171R



LIBECCIO S1P
36-47

3R085N



NEW

JARBO S3
36-47

3R453N



NEW

OSTRO S3
36-47

3R457N





SHAMAL S3
36-47

3R173O




OROSHI S1P
36-47

3R172T



NORTE S3
36-47

3R164N



GHIBLI S1P
36-47

3R182T



FLOW SB FO E P CI WRU
36-47

3R022E




NEW



LIGHT SB FO E P CI WRU
36-47

3R198E



NEW



MARIN S1P
36-47

3R174C



ZEFIRO S1P
36-47

3R163O



LODOS S1P
36-47

3R163T



CALIMA S1P
36-47

3R182V



BURAN S3
36-47

3R191O



CIENZO S3
36-47

3R198O



BEST SLIPPING RESISTANCE

KUBE




SRC
ANTI-SLIPPING SOLE

PERFECT GRIP

extra
LIGHT
shoes

ROOF GRIP UNI 11583:2015

COEFFICIENTE D'ATTRITO SECONDO LA PROVA UNI EN ISO 13287
FRICTION COEFFICIENT ACCORDING TO THE TEST UNI EN ISO 13287
ANTISTATIC PU/PU - DOUBLE DENSITY SOLE

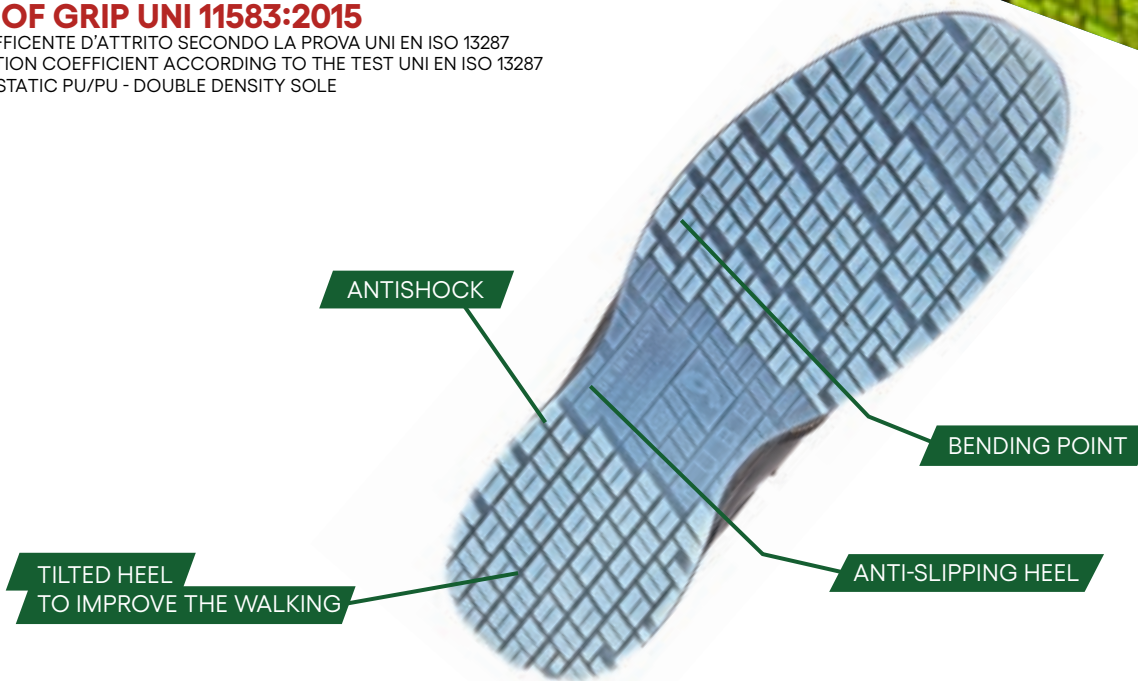



MIAMI S1P
35-47

KU093N



RUGBY S3
36-47

KU025N



BASKET S3
36-47

KU037N



KUBE



BIKE S1P
35-47

KU141T



GOLF NEW S3
39-47

KU142EV



LIBRA NEW S3
36-49

KU149EV





NORDIC S3
36-47

KU043N



BOXE S3
39-47

KU065N



KARATE S3
39-47

KU069N



PAINT S1P
35-47

KU125K



PERÙ S1P
34-47

KU095T



BOSTON S3
36-47

KU051L



FARRIER S3 CI
39-47

KU017L



DANCE S1P
35-42

KU055HF



Cady



PANAMA S1P
35-49

KU083T



KAYAK S3
36-47

KU025T



SOFTBALL S3
39-47

KU037T



VOLARE S3
36-47

KU474NA



YORK S3
35-49

KU061D



OXFORD S3
35-49

KU068D





TM



MEDINA S2

KU0020

35-47



VILNIUS S3

KU0250

36-47



FREE SB FO A E

KU0070

36-47



POLO S2

KU0021

34-49



STOCKHOLM S3

KU1911

36-47



HELSINKI SB FO A E

KU0071

36-47



BALTIC S2

KU0201

35-47



CONSTANTA S2

KU8801

37-47



ICEBERG S2 CI

KU0111

37-47



ANTISTATIC PU / RUBBER SOLE

RUBBER 4X4



SRC
ANTI-SLIPPING SOLE



WELDER S3 CI HRO

4X122D

39-47



CROSS S1P HRO

4X141T


39-47



GUN S3 CI HRO

4X165N


39-47



SAFARI S3 CI WR HRO

4X169N

39-47



BENDING POINT

ANTI-SLIPPING HEEL

ANTISHOCK

TILTED HEEL
TO IMPROVE THE WALKING

ANTISTATIC PU/PU -
DOUBLE DENSITY SOLE
ERGO SAFE



SRC
ANTI-SLIPPING SOLE


*extra
LIGHT
shoes*



SPORT S3
36-47



73N25C



GYM S3
36-47



73N37C





SANTA FE S1P
36-47




71T83C



SOCCER S3
36-47




ER025T



VOLLEYBALL S3
39-47



ER037T



HAITI S1P
36-47



71N93C



TENNIS S1P
36-47



ER172T



LIMA S1P
36-47



71T95C



ARENDAL S2
36-47



72O02



BERGEN S2
36-47



72I02



ANTISTATIC PU/PU - DOUBLE DENSITY SOLE **STABILE**



SRC
ANTI-SLIPPING SOLE

EXTRA PROTECTION OVER CAP

ANTI-TORSION INSERT

TILTED TOE
TO IMPROVE THE WALKING

TILTED HEEL
TO IMPROVE THE WALKING




KÖLN S3 CI WR
39-47

TO058L



DEFENDER S3 CI WR AN
39-47

TO159D



UTRECHT S3 CI WR
39-47

TO259L





ESSEN S3 CI
39-47

TO165N



HANNOVER S3 CI WR
39-47

TO169N



NEW


BILBAO S3 CI WR
39-47

TO149G




BERLIN S3
39-47

TO065N



BAYERN S3
39-47

TO069N



ORLANDO S3 CI
39-47

TO017L



STABILE



MALAGA S3
39-47

TO061D



GRANADA S3
39-47

TO068D



STRAUSS S3
39-47

TO880BP



ALASKA S3 CI WR
38-47

TO084B



DAKOTA S3 CI
39-47

TO011D



TITAN S3 CI
39-47

TO011G



ANTISTATIC PU/PU - DOUBLE DENSITY SOLE ***ACTION***



SRC
ANTI-SLIPPING SOLE



COMFORT TOE

BENDING POINT

ANTI-SLIPPING HEEL

ANTISHOCK

COMFORT HEEL





SALVADOR S3
39-47

AC003D



CUBA S3
36-47

AC049D



GULF S3
39-47

AC011A



DALLAS S3 CI WR
39-47

AC053N



DENVER S3 CI WR
39-47

AC057N



HAMBURG S3 CI WR
36-49

AC058L





BIG SIZE

KENT S3

36-51



AC061D



BIG SIZE

CAMBRIDGE S3

36-51



AC068D



MOZART S2

AC810B

36-47



MOZART S3

AC810BP

36-49



VERDI S2

AC880B


36-47



VERDI S3

AC880BP

36-49



VERDI S3 R

39-47



AC880BRP



SOLDADOR S3

39-47



AC880BSP



IRON RM S3

37-47



AC068DRM



ANTISTATIC PU -
RUBBER SOLE
HARD ROCK



SRC
ANTI-SLIPPING SOLE



HRO 300°C SOLE



-30°C SOLE






GENK S3 CI HI HRO
37-47

HR051L




KIEL S3 CI HI WR HRO
37-48

HR058L




CAIRO S3 CI HI HRO
39-47

HR068D



M-PROTECTION S3 HI HRO M
39-47

HR470EMR



ERCOLANO S3 HI HRO
39-47

HR066D



ALPI S3 CI HI WR HRO
37-47

HR058G





QUEBEC S3 CI HI WR HRO
39-47

HR178E



OPENING BY ZIPPER


ARTIC S3 CI HI WR HRO
39-47

HR179E



WINTER S3 CI HI WR HRO
39-47

HR011L

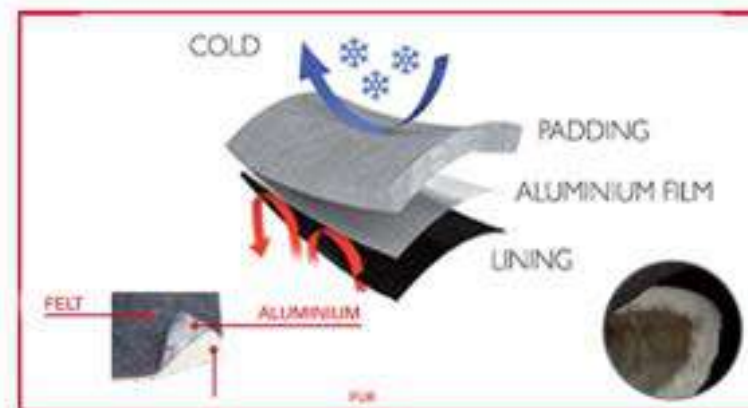

ANTIBACTERIAL TECHNOLOGY

HARD ROCK
ANTISTATIC PU - RUBBER SOLE

INSULATING PU/PU/PU SOLE
INSULATING PU / RUBBER SOLE

DIELECTRIC SOLE LINE



C.S.A. Z195-14

DIELECTRIC SOLE LINE exceeds requirements fixed from the Canadian norm CSA for electrical resistance. Determination of Electric Shock Resistance to a potential of **20.000 V** / 60 Hz, for a period of 1 min.



ASTM 2413 - 11

DIELECTRIC SOLE LINE exceeds requirements electrical resistance (EH) in accordance with ASTM 2413 - 11 electric hazard - Voltage: **20.000 V** / 60 Hz - duration: 1 min. - requirement of the electrical flow lower than 1.0 mA.



INSULATING SOLE FROM > 1000 MΩ

The bottom of the shoe, within some limits (no humidity, it does not concern the upper), offers electrical resistance against tension up to 1.000V - M Ω > 1.000



3RUN
NEW



FLOW SB FO E P CI WRU
36-47



3R022E

3RUN
NEW



LIGHT SB FO E P CI WRU
36-47



3R198E

3CROSS



THOMSON SB FO E P CI WRU
3C060D
38-47



HARD ROCK



VOLT SB FO E P HRO
39-47



HRD055H

HARD ROCK

NEW



SAMEL SB FO E P CI HI WRU HRO
HRD155D
38-47



DIELECTRIC SOLE LINE
INSULATING PU / RUBBER SOLE
INSULATING PU/PU/PU SOLE



HERTZ SB FO E P HRO
39-47



HRD154T



FRANKLIN SB FO E P CI HI WRU HRO
HRD052T
37-47



EDISON SB FO E P CI HI WRU HRO
HRD060D
37-48



AMPERE SB FO E P CI HI WRU HRO
HRD037T
39-47



TESLA SB FO E P CI HI WRU WR HRO
HRD057E
39-47



PROFESSIONAL *CITY*




SRC
ANTI-SLIPPING SOLE

extra
LIGHT
shoes
HIDDEN
OUTSOLE
TECHNOLOGY

TILTED HEEL
TO IMPROVE THE WALKING

BENDING POINT

ANTI-SLIPPING HEEL

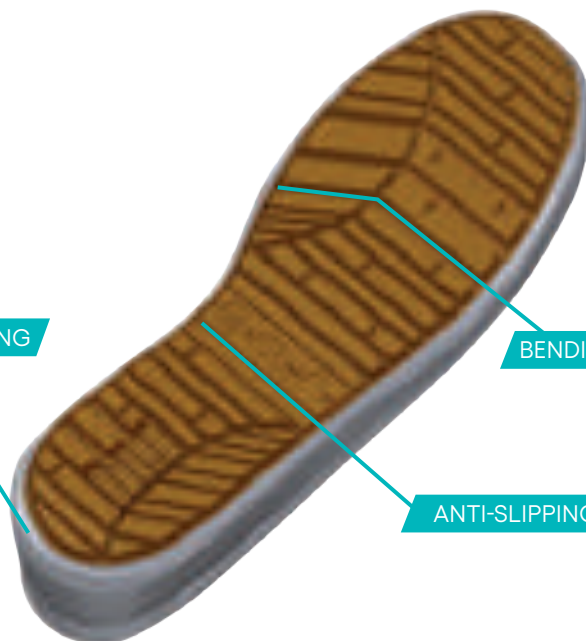




EAGLE O2 FO
36-47

C7004I



SNAKE O2 FO
36-47

C7181O




SPIDER O1P FO
36-47

C7154N



MALMO O2 FO CI
36-47

C7025O



LUTON O3 FO
36-47

C7068OC



BOOTS



CLASSE 2
24 m/s

WOODCUT S3 CI HI WR HRO (80236)
39-47



MARTE V S5
39-46



MARTE GI S5
39-46



PESCI
39-47



GIOVE P S4
39-46





1000
36-49



MEMORY
36-47



4000
35-47



5000
34-49



NEW

DIELECTRIC
37-47



GA514-10
110 cm



GA513-10
90 cm



GA600-10
80 cm



GA509-10
CM 67X32X28



UNI EN ISO 20344
UNI EN ISO 20345



SB=



Resistenza della
suola agli
idrocarburi

Sole resistance to
hydrocarbons

Résistance de la
semelle aux
hydrocarbures

Kohlenwasser-
stoff-beständige
Laufsohle

Resistencia de
la suela a los
hidrocarburos

S1=SB+E+A



Suola antiscivolo

Slipping resistant
sole

Semelle
anti-dérapante

Rutschhemmende
Laufsohle

Suela antideslizante

S1P=SB+E+A+P



Assorbimento
energia nella zona
del tallone

Energy
absorption of seat
region

Absorption de
l'énergie dans la
zone du talon

Energieaufnahme im
Fersenbereich

Absorción de energía
en la zona del talón

S2=S1+WRU



Calzatura
antistatica

Antistatic
footwear

Chaussure
antistatique

Antistatischer Schuh

Calzado antiestático

S3=S2+P



Tomaia
idrorepellente

Water resistant
upper

Empeigne
imperméable

Wasserabweisender
Oberleder

Resistencia a
la absorción y
penetración del agua
de la parte superior

Resistenza della
suola alla
perforazione

Antiperforation
midsole

Résistance de la
semelle à la
perforation

Durchtrittsichere
Zwischensohle

Resistencia de
la suela a la
perforación

UNI EN ISO 20347



OB=



Fondo isolante
contro il freddo

Cold insulation of
sole complex

Isolation de la
semelle du froid

Kälteisolierung der
Sohle

Suela aislante contra
el frío

O1= OB+E+A



Calzatura resistente
all'acqua

Water resistant shoe

Chaussure
imperméable

Wasserabweisender
Schuh

Resistencia a la
absorción y penetra-
ción del agua

O2= O1+WRU



Suola resistente al
calore
per contatto

Outsole resistant to
hot contact

Semelle résistante
à la chaleur par
contact

Hitzebeständige
Sohle

Resistencia de la
suela al calor por
contacto

O3= O2+P



Protezione
metatarsale

Metatarsal
protection

Protection
métatarsienne

Mittelfuß-Schutz

Protección
metatarsal



Protezione della
caviglia

Ankle protection

Protection de la
cheville

Knöchelschutz

Protección tobillo



USA STANDARD ASTM 2413-18 IMPACT/COMPRESSION

SITO WEB



SOCIAL MEDIA



TV SPOT



MAGAZINE



XSTICKER



29x15,5 cm

XPEN



XCARPET



60x40 cm

XPOUF



35x35x35 cm

XBAG SPORT



42x34 cm

XBAG NYLON



50x30 cm

XTOTEM



156x57x21 cm

XEXPO



183x48x30 cm

XDISPLAY



3PU PATENT

3MOVE

page 6

3PU PATENT

3HYBRID

page 9

3PU PATENT

3CROSS

page 14

3PU PATENT

3RUN

page 17

KUBE

page 21

RUBBER 4X4

page 26

ERGO SAFE

page 27

STABILE

page 29

ACTION

page 32

HARD ROCK

page 35

DIELECTRIC LINE

page 38

CITY

page 41

BOOTS

page 43

ACCESSORIES

page 44

STANDARDS

page 45

ADVERTISING

page 46

GIASCO

SAFETY SHOES



TM



1st edition - rev. 1

BOOK2022

